


## STADI MP

UNIQUE MULTI-PURPOSE POWDER DIFFRACTOMETER OFFERING THREE GEOMETRIES



### POWDER DIFFRACTOMETRY


- Transmission | Debye-Scherrer, High Flux and Bragg-Brentano modes
- No realignment necessary when moving from one geometry to another
- All geometries running with pure Co, Cu, Mo or Ag  $K_{\alpha 1}$ -radiation
- State of the art detectors: Scintillation counter, position sensitive wire, imaging plate and silicon strip detectors

YOUR PARTNER IN X-RAY DIFFRACTION

STOE & Cie GmbH | WWW.STOE.COM

# STADI MP

## ONE DIFFRACTOMETER, THREE GEOMETRIES

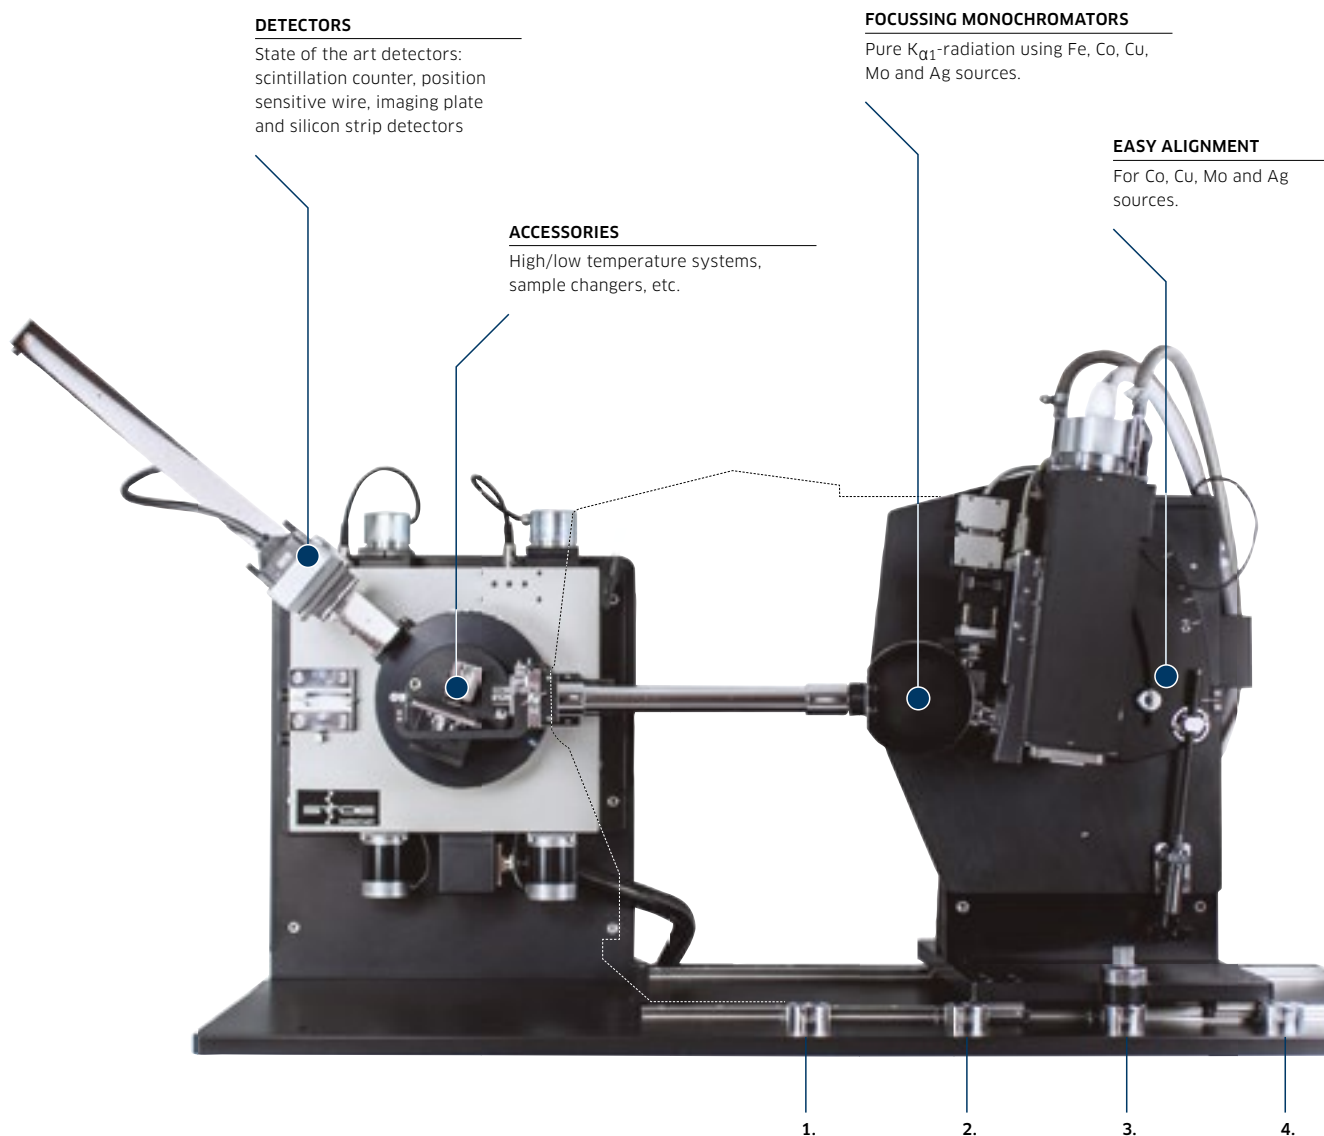

### DETECTORS

State of the art detectors: scintillation counter, position sensitive wire, imaging plate and silicon strip detectors

### ACCESSORIES

High/low temperature systems, sample changers, etc.

### FOCUSING MONOCHROMATORS

Pure  $K_{\alpha 1}$ -radiation using Fe, Co, Cu, Mo and Ag sources.

### EASY ALIGNMENT

For Co, Cu, Mo and Ag sources.

### STADI MP


- Various state of the art detectors
- High and low temperature attachments
- Transmission / Debye-Scherrer, High Flux and Bragg-Brentano mode
- Geometry selection by sliding tube housing
- No realignment after changing geometries
- All geometries running with pure Co, Cu, Mo or Ag  $K_{\alpha 1}$  radiation

STOE has developed a new type of diffractometer that gives you more versatility and superior performance than any other system on the market. **STADI MP** combines the three most common diffractometer configurations: Transmission geometry, Bragg-Brentano geometry and a set-up for micro-diffraction (High Flux).


### ONE GONIOMETER - THREE GEOMETRIES:

1. Transmission
2. High Flux
3. Bragg-Brentano | Low Resolution
4. Bragg-Brentano | High Resolution

# BRAGG-BRENTANO, MICRO-DIFFRACTION AND THE ESTABLISHED TRANSMISSION GEOMETRY INVENTED BY STOE, COMBINED IN ONE INSTRUMENT

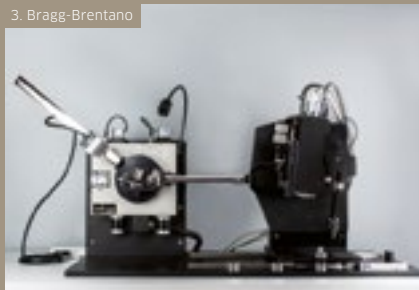

Reflectometry sample holder

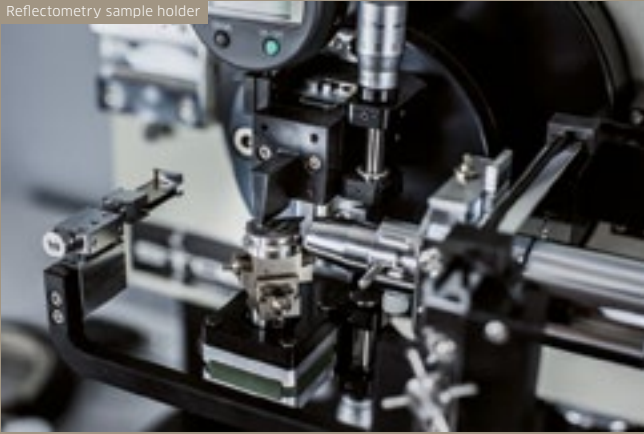

## Advantages of Transmission/ Debye-Scherrer geometry

1. Reliable intensities over the full  $2\theta$  scale
2. Real microsampling possible
3. No height displacement
4. Smallest  $2\theta$  angles possible
5. Easy handling of air-/moisture sensitive or hazardous materials

Debye-Scherrer Geometry



Evacuatable Beamguide



Transmission Geometry





## SPECIFICATIONS

Dimensions (including system cabinet, max.)	1800x880x 2050 mm
Weight (complete system)	670 kg
2 $\theta$ range	-10° to +140° or better, depending on selected geometry
Goniometer	2 circles
Radius of measuring circle	140 mm to 573 mm depending on selected geometry and detector
Radius of focusing circle	80 mm or 160 mm depending on selected geometry
X-ray sources	Sealed Tubes: Co, Cu, Mo, Ag
Software	WinX <sup>POW</sup> package
Detectors	<ul style="list-style-type: none"> <li>• Silicon strip detector MYTHEN 1K</li> <li>• STOE linear wire PSD</li> <li>• Curved IP-PSD (80° or 140° aperture)</li> <li>• Point detectors</li> </ul>
Accessories	<ul style="list-style-type: none"> <li>• High and low temperature attachments for reflection and capillary samples</li> <li>• Reaction chamber for reflection samples</li> <li>• Various sample stages</li> <li>• Various sample changers</li> </ul>

Specifications without obligation and subject to change without notice.